
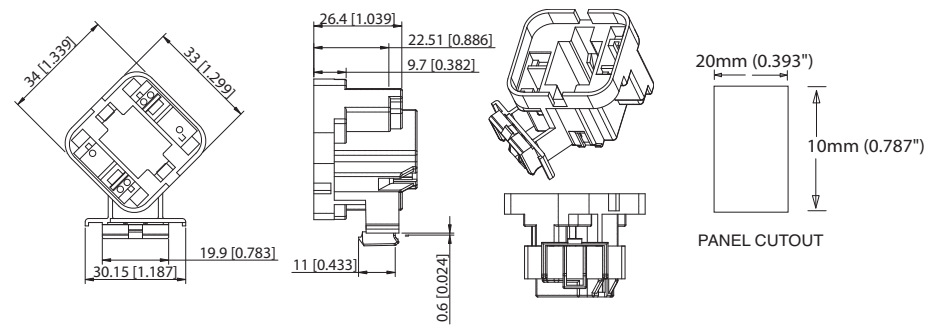
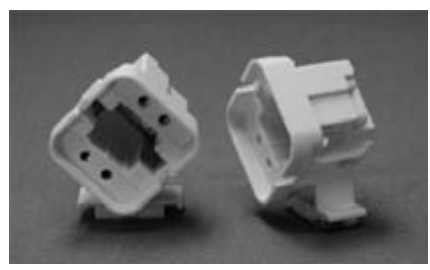


G24-q/d
GX24-q/d

COMPACT FLOURESCENT LAMPHOLDERS

FL423V-Q-45-BSI	Multi Wattage, Non-Keyed, Snap In Mount
FL423V-Q1-45-BSI	13W 4 Pin Horizontal Snap In Mount
FL423V-Q2-45-BSI	18W 4 Pin Horizontal Snap In Mount
FL423V-Q3-45-BSI	26/32W 4 Pin Horizontal Snap In Mount
FL423V-Q3/4-45-BSI	26/32/42W 4 Pin Horizontal Snap In Mount
FL423V-Q4-45-BSI	42W 4 Pin Horizontal Snap In Mount

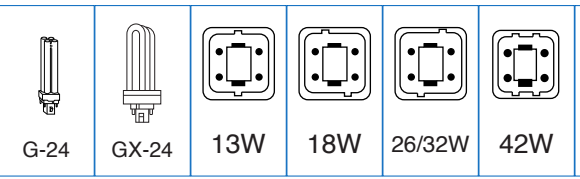



- For 4 pin electronic ballasted quad or triple tube lamps
- White Polycarbonate body, 110°C rated
- Metal spring clip for positive lamp retention

- Quick connect push-in wire terminals for 18 AWG Solid or Twist & Tin or solder dipped wire, stripped 3/8"
- Two wire ports per terminal to speed

- harness wiring
- Snap In mount on base plate
- Rated 75W, 600V
- cCSA_{US} Certified / cUL_{US} Listed

*Available in higher temperature material - 125C - Lexan 223R - ADD SUFFIX -223R to the part number

FL448-D 13/18/26W Non-Keyed 2 Pin Outer Thread Screw Mount

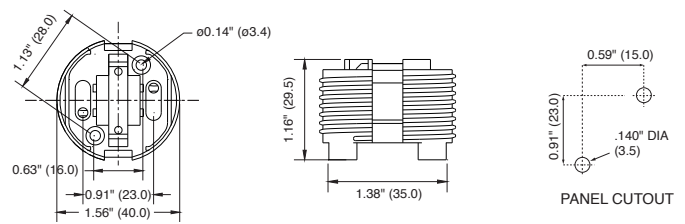
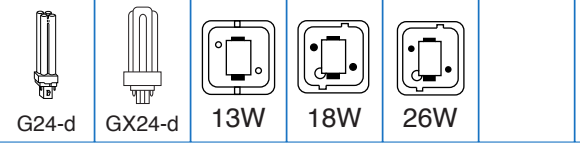


- For 2 pin quad lamps
- White high heat PC body
- Two hole screw mounting in base or use snap-on caps to secure to

- 1/8" IPS or 1/4" IPS pipe
- Quick connect push-in wire terminals for 18 AWG Solid or Twist & Tin or solder dipped wire, stripped 3/8"

- Metal spring clip for positive lamp retention
- Rated 75W, 600V
- cCSA_{US} Certified / cUL_{US} Listed

FL448-Q 13/18/26/32/42W Non-Keyed 4 Pin Outer Thread Screw Mount

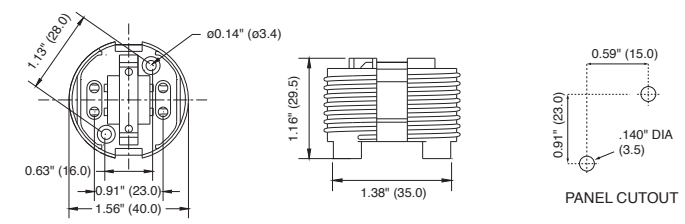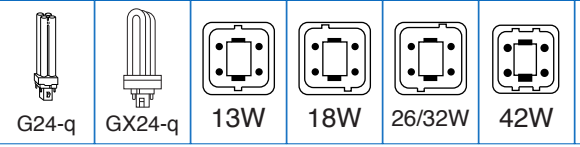

- For 4 pin electronically ballasted quad lamps
- White high heat PC body
- Two hole screw mounting in base or use snap-on caps to secure to 1/8" IPS or 1/4" IPS pipe
- Quick connect push-in wire terminals

- for 18 AWG Solid or Twist & Tin or solder dipped wire, stripped 3/8"

- Metal spring clip for positive lamp retention
- Rated 75W, 600V
- cCSA_{US} Certified / cUL_{US} Listed

Compact Fluorescent