

LINEAR T5 1 or 2x21W, 14W, 13W

Programmed Start (Low Profile)

Programmed Start (Series) Universal Voltage 120V-277V or 347V, High Frequency Electronic ballast for Linear Standard T5 one or two (1 or 2) 21W, 14W, 13W GE, Philips or Osram Fluorescent lamps.

Technical Specification:

UL Listed, CUL Certified, ROHS Compliant
 EMI FCC Parts 18, Subparts C, Class A
 Rating: Type 1 Outdoor, HL
 Sound Rating: Class A
 Min. Starting Temp : -30° C
 Max. Case Temp: 90° C
 End of Lamp Life Protection Circuit

Surge Protection: Meets ANSI C62.41
 Thermal Protection: CLASS P
 Lamp Current Crest Factor: < 1.6
 Remote Mounting Distance: 21 ft
 Power Factor: 0.99
 Input Frequency: 50/60HZ
 THD: 120V and 277V < 10%
 347V 2-lamp 277V 1-lamp 14/13W < 15%
 347V 14/13W 1-lamp < 20%

Case Size: Series E5



Due to continuing efforts to offer improved products all specifications are subject to change without prior notice

9/10/11

NO. OF LAMPS	INPUT VOLTAGE	LAMP WATTS	INPUT WATTS AVERAGE	MAX INPUT CURRENT (A)	BALLAST FACTOR	MODEL
2 & 1	120V	21/14/13	50/34, 26/18, 26/17	0.40/0.28, 0.21/0.15, 0.21/0.15	1.0/1.05	NU221T5-ROHS
2 & 1	277V	21/14/13	50/34, 26/18, 26/17	0.18/0.12, 0.09/0.06, 0.09/0.06	1.0/1.05	"
2 & 1	347V	21/14/13	50/34, 26/18, 26/17	0.14/0.09, 0.07/0.05, 0.07/0.05	1.0/1.05	NC221T5-ROHS

LIMITED WARRANTY

5 YEAR at maximum case temperature 75 deg C. 3 YEAR at maximum case temperature 90 deg C. Manufacturer warrants to the purchaser: Electronic Ballast will be free from defects in material or workmanship from the date of manufacture conditioned upon proper storage, installation, use, and maintenance and conformance with any recommendations of Manufacturer.

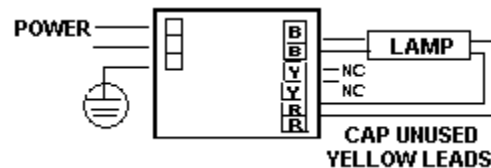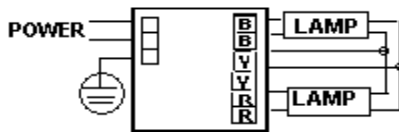

WARNING: Always Disconnect Power Before Handling.
Case Should be Grounded. Install in Accordance with National and Local Electrical Codes.

Case Size: L W H ML
 Series E5 292mm 34mm 27mm 285mm
 11.5inch 1.34inch 1.06inch 11.25inch

500 Marine Drive, #200 North Vancouver, BC V7P 1T7
 TEL: 604-904-9533 FAX: 604-904-9634
 EMAIL: sagelighting@shaw.ca www.sagelighting.com

*Sage
 Lighting Ltd.*